



VALOR DOWNLIGHT



Extra bright
Greater reliability
Easy installation

simon

Barcelona · Belo Horizonte · Brussels · Buenos Aires · Casablanca · Hanoi
Istanbul · Kiev · Lima · Lisbon · Madrid · Mexico D.F · Moscow · New Delhi
Paris · Sao Paulo · Shanghai · Turin · Warsaw · Jakarta

SIMON, S.A.
Tel. 902 109 100
Web. www.simonelectric.com

Vietnam Office of Simon Electric
Tel. +84 4 3222750
Web. www.simon.vn

Simon Electric (China)
Web. <http://international.simon.com.cn>
E-mail. export@simon-apac.com

PT Simon Elektrik Indonesia
Tel. +6221 52960373
Web. www.simonelektrik.co.id

simon
Since 1916 From Barcelona

The advantages of LEDs, the confidence of Simon




EXTENDED LIFE



LIGHT QUALITY



HIGH PERFORMANCE /
ENERGY SAVING

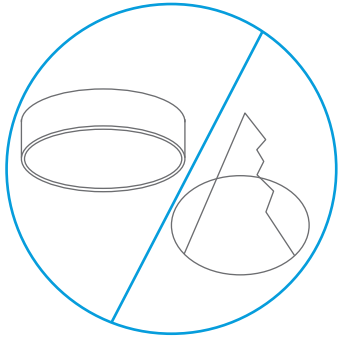

● **1 Multiple installation:** can be installed in any kind of ceiling to bring good lighting in every corner of your home.

● **2 Robust fixing clip:** easy to install always in the proper way to create a safety installation.



● **3 Wide range variety:** solutions for all your lighting needs and family comfort.



● **4 Uniformity lit surface:** Comfortable for your eyes, protecting your health.

● **5 Build/in power supply:** No need extra space to fit the power supply.



● **6 Low profile, from 33mm:** no need big ceiling, save more space for your room.

2 YEARS
WARRANTY



VALOR LED DOWNLIGHT


Low profile Downlight, recessed, for general lighting.

Characteristics

Power: 8 – 24W
 Light flux: 600 – 2000lm
 Colour temperature: 3000 – 6500K
 Light distribution: general
 CRI: >80
 Finishes: white
 Power supply: included
 Connection: 220-240V 50/60Hz
 Product size: Ø115 – Ø215mm
 Installation hole: Ø95 – Ø 205
 Lifetime (L70) 20000h
 2 Years warranty


Advantages

Direct light emission.
 Built-in Power supply.
 Low profile for installation in suspended ceilings or tight spaces.
 Opal diffuser (light points cannot be seen).
 Instant start.
 The life of the luminaire is not dependent on the number of starts.
 Energy saving.
 No flickering.
 Surface accessory with heat dissipation holes.
 Squared version.

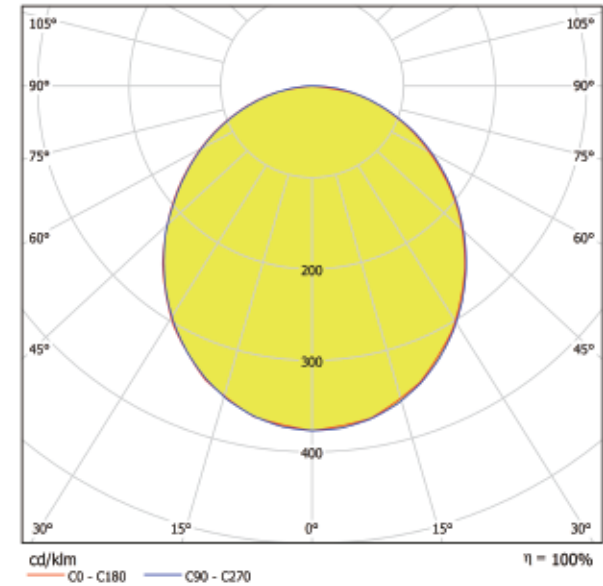


Photometric information corresponding at 24W 4000K.




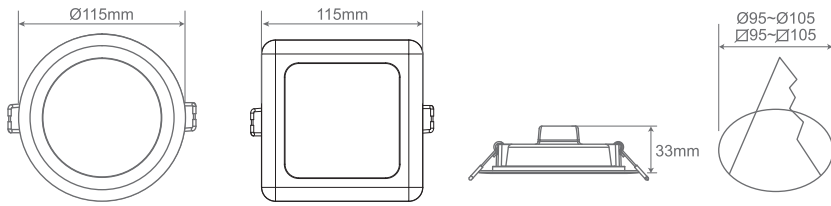


Reference	Description	Luminous flux(Lm)	Quantity / Carton	Carton size
N03E0-1099	Valor LED round DL 8W 3000K	600	30 PCS/CTN	373 x 252 x 230 mm
N03E0-1100	Valor LED round DL 8W 4000K	630		
N03E0-1101	Valor LED round DL 8W 6500K	650		
N03E0-1118	Valor LED square DL 8W 3000K	600	30 PCS/CTN	371 x 282 x 225 mm
N03E0-1119	Valor LED square DL 8W 4000K	600		
N03E0-1120	Valor LED square DL 8W 6500K	600		

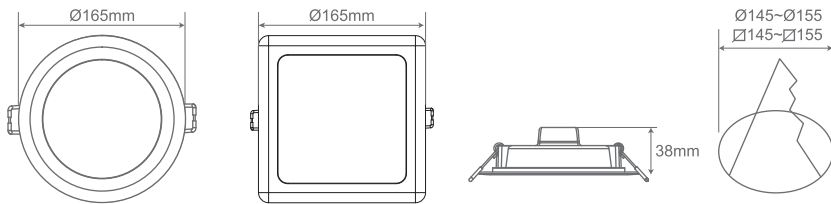


Reference	Description	Luminous flux(Lm)	Quantity / Carton	Carton size
N03E0-1105	Valor LED round DL 17W 3000K	1200	30 PCS/CTN	515 x 345 x 245 mm
N03E0-1106	Valor LED round DL 17W 4000K	1260		
N03E0-1107	Valor LED round DL 17W 6500K	1300		
N03E0-1121	Valor LED square DL 16W 3000K	1200	30 PCS/CTN	527 x 383 x 240 mm
N03E0-1122	Valor LED square DL 16W 4000K	1200		
N03E0-1123	Valor LED square DL 16W 6500K	1200		
N03E0-1114	Round DL surface accessory	-	72 PCS/CTN	510 x 510 x 395 mm
N03E0-1116	Square DL surface accessory	-		

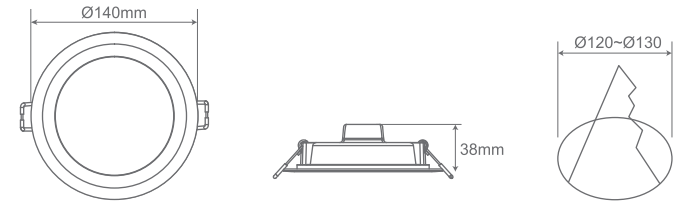

Reference	Description	Luminous flux(Lm)	Quantity / Carton	Carton size
N03E0-1102	Valor LED round DL 12W 3000K CT	900	30 PCS/CTN	440 x 295 x 245 mm
N03E0-1103	Valor LED round DL 12W 4000K CT	960		
N03E0-1104	Valor LED round DL 12W 6500K CT	1000		

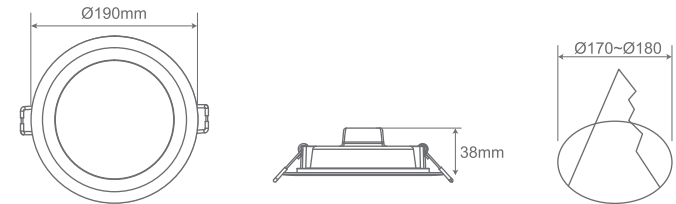

Reference	Description	Luminous flux(Lm)	Quantity / Carton	Carton size
N03E0-1108	Valor LED round DL 20W 3000K	1500	30 PCS/CTN	590 x 395 x 245 mm
N03E0-1109	Valor LED round DL 20W 4000K	1580		
N03E0-1110	Valor LED round DL 20W 6500K	1610		

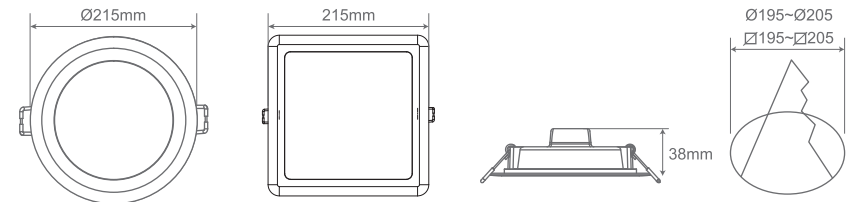

Reference	Description	Luminous flux(Lm)	Quantity / Carton	Carton size
N03E0-1111	Valor LED round DL 24W 3000K	2000	30 PCS/CTN	665 x 445 x 245 mm
N03E0-1112	Valor LED round DL 24W 4000K	2080		
N03E0-1113	Valor LED round DL 24W 6500K	2100		
N03E0-1124	Valor LED square DL 24W 3000K	2000	30 PCS/CTN	677 x 478 x 225 mm
N03E0-1125	Valor LED square DL 24W 4000K	2000		
N03E0-1126	Valor LED square DL 24W 6500K	2000		
N03E0-1115	Round DL surface accessory	-	48 PCS/CTN	660 x 442 x 395 mm
N03E0-1117	Square DL surface accessory	-		