

simon

Barcelona • Belo Horizonte • Brussels • Buenos Aires • Casablanca • Hanoi Istanbul • Kiev • Lima • Lisbon • Madrid • Mexico D.F • Moscow • New Delhi Paris • Sao Paulo • Shanghai • Turin • Warsaw • Jakarta

SIMON, S.A.
Tel. +34 902 109100
Web. www.simonelectric.com

Simon Electric (China)
Tel. +86 21 3855 5222
Web. <https://www.simon.com.cn/>

Simon Electric (APAC)
Web. www.simon-apac.com
E-mail. info@simon-apac.com

Vietnam Office of Simon Electric
Tel. +84 24 3222750
Web. www.simon-apac.com

PT Simon Elektrik Indonesia
Tel. +62 21 52960373
Web. www.simonelektrik.co.id

May 2020 Printed

Arch

simon

Arch

simon



A R C H

Arch

Arch is simplicity and elegance. Emotion through its geometry, a circle or square of light.

Arch can be grouped and is steerable, it is a luminaire that can be built in, trimless or surface.

Arch is suitable for general lighting or to highlight a space.

Josep Lluscà design for Simon






Arch X-less

X-less is an installation system for total integration in ceilings, turning them into light substance that offers creative freedom in lighting projects.




Arch Recessed



Arch Trimless



Arch Surface

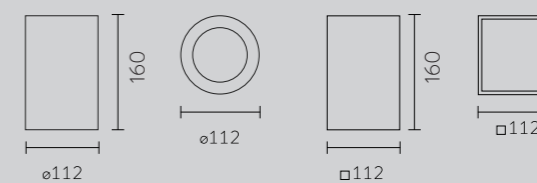

Flexible

It is for general and accent lighting. The design and light possibilities of the range allow the designer to create atmospheres and sensations. Its modularity makes it suitable for different spaces, depending on the aesthetic requirements.

Efficiency and comfort

Arch offers an elegant aesthetic with exceptional visual comfort.



Luminaire Body

Aluminium body painted in black or white. Special heat dissipation system that allows for lighting block swivelling. Recessed, trimless or surface-mounted installation.

LED

High efficiency LED with colour temperatures of 2700K - CRI 90 , 3000K - CRI 90 and 4000K - CRI 90.

Double light orientation

An innovative bi-directional rotation system was designed to allow round lights to rotate 360° vertically and 25° horizontally. With this system you can direct the light in any direction without moving the luminaire. The square versions can rotate 25° horizontally, orienting the luminous flow easily and without needing to use tools.




Rotation of 360° on the vertical axis, 25° on the horizontal axis







25° rotation on a horizontal axis



Item



Composition

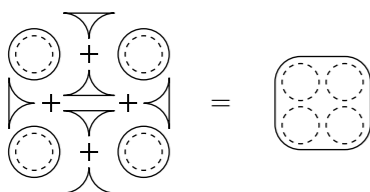

Arch X-less

Solid system – perfect light

The trimless X-Less system offers a solid connection between the luminaire and the ceiling in a complete integration that ensures its stability even when attaching adjustable models. Maximum light quality on a uniform surface and without imperfections.

Easy and quick installation

The installation process is simpler than in the conventional frameless formats, where more complex building work is required as well as additional plastering. X-Less allows for the pre-frames to be attached quickly, in just a few minutes, and to finish the operation by just applying a thin layer of leveling paste.

Modular composition


The X-Less collections support the creation of grouped modular configurations in addition to endless free customized compositions. The system allows the arrangement of luminaires as close as possible and without visible frames.




Arch Recessed

Arch Trimless

Arch Surface




Power	9W, 12W	Rotation	360°
Beam Angle	18°, 40°	Colour stability	SDCM < 3
Luminous flux (Lm)	830lm-1080lm	Control	On/Off, 1-10V, DALI
Colour temperature	2700K, 3000K, 4000K	Voltage input	220-240V
CRI	> 90	Finishing	Black, White
Lifetime	L70 > 50,000h@25°C		




Spot 18°

Flood 40°

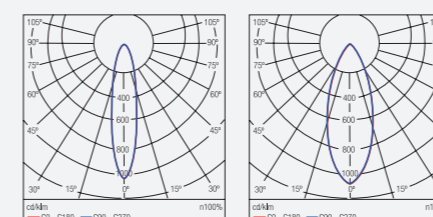


Arch Recessed

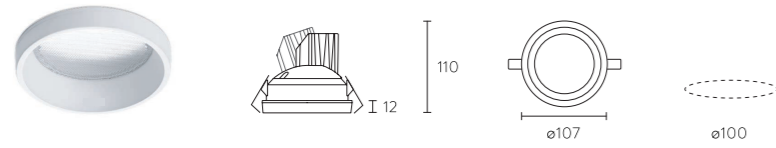


Item code	Product description	Power	CCT	Luminous flux (Lm)	CRI	Beam Angle	Cutout size (mm)	Finishing
N0424-1450	Fluvia LED-ARCH WH-RD-Rcd 9W2700K18°	9W	2700K	750	90	18°	Ø97	White
N0424-1451	Fluvia LED-ARCH WH-RD-Rcd 9W2700K40°	9W	2700K	750	90	40°	Ø97	White
N0424-1453	Fluvia LED-ARCH WH-RD-Rcd 9W3000K18°	9W	3000K	760	90	18°	Ø97	White
N0424-1454	Fluvia LED-ARCH WH-RD-Rcd 9W3000K40°	9W	3000K	760	90	40°	Ø97	White
N0424-1456	Fluvia LED-ARCH WH-RD-Rcd 9W4000K18°	9W	4000K	830	90	18°	Ø97	White
N0424-1457	Fluvia LED-ARCH WH-RD-Rcd 9W4000K40°	9W	4000K	830	90	40°	Ø97	White
N0424-1459	Fluvia LED-ARCH BK-RD-Rcd 9W2700K18°	9W	2700K	750	90	18°	Ø97	Black
N0424-1460	Fluvia LED-ARCH BK-RD-Rcd 9W2700K40°	9W	2700K	750	90	40°	Ø97	Black
N0424-1462	Fluvia LED-ARCH BK-RD-Rcd 9W3000K18°	9W	3000K	760	90	18°	Ø97	Black
N0424-1463	Fluvia LED-ARCH BK-RD-Rcd 9W3000K40°	9W	3000K	760	90	40°	Ø97	Black
N0424-1465	Fluvia LED-ARCH BK-RD-Rcd 9W4000K18°	9W	4000K	830	90	18°	Ø97	Black
N0424-1466	Fluvia LED-ARCH BK-RD-Rcd 9W4000K40°	9W	4000K	830	90	40°	Ø97	Black
N0424-1565	Fluvia LED-ARCH WH-RD-Rcd 12W2700K18°	12W	2700K	1040	90	18°	Ø97	White
N0424-1566	Fluvia LED-ARCH WH-RD-Rcd 12W2700K40°	12W	2700K	1040	90	40°	Ø97	White
N0424-1568	Fluvia LED-ARCH WH-RD-Rcd 12W3000K18°	12W	3000K	1060	90	18°	Ø97	White
N0424-1569	Fluvia LED-ARCH WH-RD-Rcd 12W3000K40°	12W	3000K	1060	90	40°	Ø97	White
N0424-1571	Fluvia LED-ARCH WH-RD-Rcd 12W4000K18°	12W	4000K	1080	90	18°	Ø97	White
N0424-1572	Fluvia LED-ARCH WH-RD-Rcd 12W4000K40°	12W	4000K	1080	90	40°	Ø97	White
N0424-1574	Fluvia LED-ARCH BK-RD-Rcd 12W2700K18°	12W	2700K	1040	90	18°	Ø97	Black
N0424-1575	Fluvia LED-ARCH BK-RD-Rcd 12W2700K40°	12W	2700K	1040	90	40°	Ø97	Black
N0424-1577	Fluvia LED-ARCH BK-RD-Rcd 12W3000K18°	12W	3000K	1060	90	18°	Ø97	Black
N0424-1578	Fluvia LED-ARCH BK-RD-Rcd 12W3000K40°	12W	3000K	1060	90	40°	Ø97	Black
N0424-1580	Fluvia LED-ARCH BK-RD-Rcd 12W4000K18°	12W	4000K	1080	90	18°	Ø97	Black
N0424-1581	Fluvia LED-ARCH BK-RD-Rcd 12W4000K40°	12W	4000K	1080	90	40°	Ø97	Black

Arch Recessed

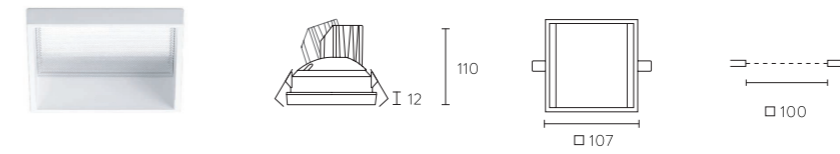

Item code	Product description	Power	CCT	Luminous flux (Lm)	CRI	Beam Angle	Cutout size (mm)	Finishing
N0424-1486	Fluvia LED-ARCH WH-SQ-Rcd 9W2700K18°	9W	2700K	750	90	18°	97×97	White
N0424-1487	Fluvia LED-ARCH WH-SQ-Rcd 9W2700K40°	9W	2700K	750	90	40°	97×97	White
N0424-1489	Fluvia LED-ARCH WH-SQ-Rcd 9W3000K18°	9W	3000K	760	90	18°	97×97	White
N0424-1490	Fluvia LED-ARCH WH-SQ-Rcd 9W3000K40°	9W	3000K	760	90	40°	97×97	White
N0424-1492	Fluvia LED-ARCH WH-SQ-Rcd 9W4000K18°	9W	4000K	830	90	18°	97×97	White
N0424-1493	Fluvia LED-ARCH WH-SQ-Rcd 9W4000K40°	9W	4000K	830	90	40°	97×97	White
N0424-1495	Fluvia LED-ARCH BK-SQ-Rcd 9W2700K18°	9W	2700K	750	90	18°	97×97	Black
N0424-1496	Fluvia LED-ARCH BK-SQ-Rcd 9W2700K40°	9W	2700K	750	90	40°	97×97	Black
N0424-1498	Fluvia LED-ARCH BK-SQ-Rcd 9W3000K18°	9W	3000K	760	90	18°	97×97	Black
N0424-1499	Fluvia LED-ARCH BK-SQ-Rcd 9W3000K40°	9W	3000K	760	90	40°	97×97	Black
N0424-1501	Fluvia LED-ARCH BK-SQ-Rcd 9W4000K18°	9W	4000K	830	90	18°	97×97	Black
N0424-1502	Fluvia LED-ARCH BK-SQ-Rcd 9W4000K40°	9W	4000K	830	90	40°	97×97	Black
N0424-1583	Fluvia LED-ARCH WH-SQ-Rcd 12W2700K18°	12W	2700K	1040	90	18°	97×97	White
N0424-1584	Fluvia LED-ARCH WH-SQ-Rcd 12W2700K40°	12W	2700K	1040	90	40°	97×97	White
N0424-1586	Fluvia LED-ARCH WH-SQ-Rcd 12W3000K18°	12W	3000K	1060	90	18°	97×97	White
N0424-1587	Fluvia LED-ARCH WH-SQ-Rcd 12W3000K40°	12W	3000K	1060	90	40°	97×97	White
N0424-1589	Fluvia LED-ARCH WH-SQ-Rcd 12W4000K18°	12W	4000K	1080	90	18°	97×97	White
N0424-1590	Fluvia LED-ARCH WH-SQ-Rcd 12W4000K40°	12W	4000K	1080	90	40°	97×97	White
N0424-1592	Fluvia LED-ARCH BK-SQ-Rcd 12W2700K18°	12W	2700K	1040	90	18°	97×97	Black
N0424-1593	Fluvia LED-ARCH BK-SQ-Rcd 12W2700K40°	12W	2700K	1040	90	40°	97×97	Black
N0424-1595	Fluvia LED-ARCH BK-SQ-Rcd 12W3000K18°	12W	3000K	1060	90	18°	97×97	Black
N0424-1596	Fluvia LED-ARCH BK-SQ-Rcd 12W3000K40°	12W	3000K	1060	90	40°	97×97	Black
N0424-1598	Fluvia LED-ARCH BK-SQ-Rcd 12W4000K18°	12W	4000K	1080	90	18°	97×97	Black
N0424-1599	Fluvia LED-ARCH BK-SQ-Rcd 12W4000K40°	12W	4000K	1080	90	40°	97×97	Black


Arch Trimless

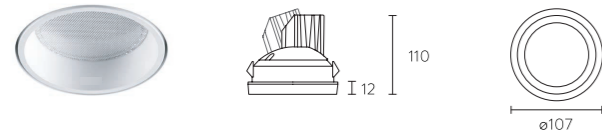

Item code	Product description	Power	CCT	Luminous flux (Lm)	CRI	Beam Angle	Cutout size (mm)	Finishing
N0424-1522	Fluvia LED-ARCH WH-RD-TLess 9W2700K18°	9W	2700K	750	90	18°	Ø134	White
N0424-1523	Fluvia LED-ARCH WH-RD-TLess 9W3000K18°	9W	3000K	760	90	18°	Ø134	White
N0424-1524	Fluvia LED-ARCH WH-RD-TLess 9W4000K18°	9W	4000K	830	90	18°	Ø134	White
N0424-1525	Fluvia LED-ARCH WH-RD-TLess 9W2700K40°	9W	2700K	750	90	40°	Ø134	White
N0424-1526	Fluvia LED-ARCH WH-RD-TLess 9W3000K40°	9W	3000K	760	90	40°	Ø134	White
N0424-1527	Fluvia LED-ARCH WH-RD-TLess 9W4000K40°	9W	4000K	830	90	40°	Ø134	White
N0424-1528	Fluvia LED-ARCH BK-RD-TLess 9W2700K18°	9W	2700K	750	90	18°	Ø134	Black
N0424-1529	Fluvia LED-ARCH BK-RD-TLess 9W3000K18°	9W	3000K	760	90	18°	Ø134	Black
N0424-1530	Fluvia LED-ARCH BK-RD-TLess 9W4000K18°	9W	4000K	830	90	18°	Ø134	Black
N0424-1531	Fluvia LED-ARCH BK-RD-TLess 9W2700K40°	9W	2700K	750	90	40°	Ø134	Black
N0424-1532	Fluvia LED-ARCH BK-RD-TLess 9W3000K40°	9W	3000K	760	90	40°	Ø134	Black
N0424-1533	Fluvia LED-ARCH BK-RD-TLess 9W4000K40°	9W	4000K	830	90	40°	Ø134	Black
N0424-1601	Fluvia LED-ARCH WH-RD-TLess 12W2700K18°	12W	2700K	750	90	18°	Ø134	White
N0424-1602	Fluvia LED-ARCH WH-RD-TLess 12W3000K18°	12W	3000K	760	90	18°	Ø134	White
N0424-1603	Fluvia LED-ARCH WH-RD-TLess 12W4000K18°	12W	4000K	830	90	18°	Ø134	White
N0424-1604	Fluvia LED-ARCH WH-RD-TLess 12W2700K40°	12W	2700K	750	90	40°	Ø134	White
N0424-1605	Fluvia LED-ARCH WH-RD-TLess 12W3000K40°	12W	3000K	760	90	40°	Ø134	White
N0424-1606	Fluvia LED-ARCH WH-RD-TLess 12W4000K40°	12W	4000K	830	90	40°	Ø134	White
N0424-1607	Fluvia LED-ARCH BK-RD-TLess 12W2700K18°	12W	2700K	750	90	18°	Ø134	Black
N0424-1608	Fluvia LED-ARCH BK-RD-TLess 12W3000K18°	12W	3000K	760	90	18°	Ø134	Black
N0424-1609	Fluvia LED-ARCH BK-RD-TLess 12W4000K18°	12W	4000K	830	90	18°	Ø134	Black
N0424-1610	Fluvia LED-ARCH BK-RD-TLess 12W2700K40°	12W	2700K	750	90	40°	Ø134	Black
N0424-1611	Fluvia LED-ARCH BK-RD-TLess 12W3000K40°	12W	3000K	760	90	40°	Ø134	Black
N0424-1612	Fluvia LED-ARCH BK-RD-TLess 12W4000K40°	12W	4000K	830	90	40°	Ø134	Black

* Requires X-Less accessory for installation

Arch Trimless



Item code	Product description	Power	CCT	Luminous flux (Lm)	CRI	Beam Angle	Cutout size (mm)	Finishing
N0424-1534	Fluvia LED-ARCH WH-SQ-TLess 9W2700K18°	9W	2700K	750	90	18°	134×134	White
N0424-1535	Fluvia LED-ARCH WH-SQ-TLess 9W3000K18°	9W	3000K	760	90	18°	134×134	White
N0424-1536	Fluvia LED-ARCH WH-SQ-TLess 9W4000K18°	9W	4000K	830	90	18°	134×134	White
N0424-1537	Fluvia LED-ARCH WH-SQ-TLess 9W2700K40°	9W	2700K	750	90	40°	134×134	White
N0424-1538	Fluvia LED-ARCH WH-SQ-TLess 9W3000K40°	9W	3000K	760	90	40°	134×134	White
N0424-1539	Fluvia LED-ARCH WH-SQ-TLess 9W4000K40°	9W	4000K	830	90	40°	134×134	White
N0424-1540	Fluvia LED-ARCH BK-SQ-TLess 9W2700K18°	9W	2700K	750	90	18°	134×134	Black
N0424-1541	Fluvia LED-ARCH BK-SQ-TLess 9W3000K18°	9W	3000K	760	90	18°	134×134	Black
N0424-1542	Fluvia LED-ARCH BK-SQ-TLess 9W4000K18°	9W	4000K	830	90	18°	134×134	Black
N0424-1543	Fluvia LED-ARCH BK-SQ-TLess 9W2700K40°	9W	2700K	750	90	40°	134×134	Black
N0424-1544	Fluvia LED-ARCH BK-SQ-TLess 9W3000K40°	9W	3000K	760	90	40°	134×134	Black
N0424-1545	Fluvia LED-ARCH BK-SQ-TLess 9W4000K40°	9W	4000K	830	90	40°	134×134	Black
N0424-1613	Fluvia LED-ARCH WH-SQ-TLess 12W2700K18°	12W	2700K	750	90	18°	134×134	White
N0424-1614	Fluvia LED-ARCH WH-SQ-TLess 12W3000K18°	12W	3000K	760	90	18°	134×134	White
N0424-1615	Fluvia LED-ARCH WH-SQ-TLess 12W4000K18°	12W	4000K	830	90	18°	134×134	White
N0424-1616	Fluvia LED-ARCH WH-SQ-TLess 12W2700K40°	12W	2700K	750	90	40°	134×134	White
N0424-1617	Fluvia LED-ARCH WH-SQ-TLess 12W3000K40°	12W	3000K	760	90	40°	134×134	White
N0424-1618	Fluvia LED-ARCH WH-SQ-TLess 12W4000K40°	12W	4000K	830	90	40°	134×134	White
N0424-1619	Fluvia LED-ARCH BK-SQ-TLess 12W2700K18°	12W	2700K	750	90	18°	134×134	Black
N0424-1620	Fluvia LED-ARCH BK-SQ-TLess 12W3000K18°	12W	3000K	760	90	18°	134×134	Black
N0424-1621	Fluvia LED-ARCH BK-SQ-TLess 12W4000K18°	12W	4000K	830	90	18°	134×134	Black
N0424-1622	Fluvia LED-ARCH BK-SQ-TLess 12W2700K40°	12W	2700K	750	90	40°	134×134	Black
N0424-1623	Fluvia LED-ARCH BK-SQ-TLess 12W3000K40°	12W	3000K	760	90	40°	134×134	Black
N0424-1624	Fluvia LED-ARCH BK-SQ-TLess 12W4000K40°	12W	4000K	830	90	40°	134×134	Black

* Requires X-Less accessory for installation


X-Less Patented Trimless system



Item code
N0424-1625

Product description
Fluvia ARCH X-Less RD-Trimless accessory

Cutout size (mm)
Ø134

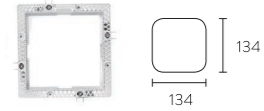


Item code
N0424-1626

Product description
Fluvia ARCH X-Less SQ-Trimless accessory


Cutout size (mm)
134 x 134

Arch configuration options

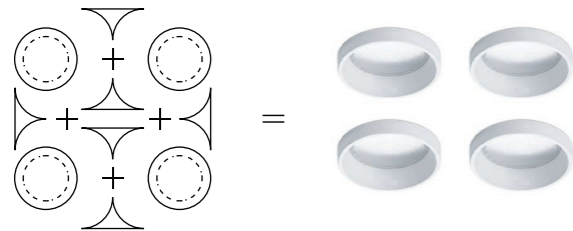


⋮
⋮
⋮
⋮

Arch Surface

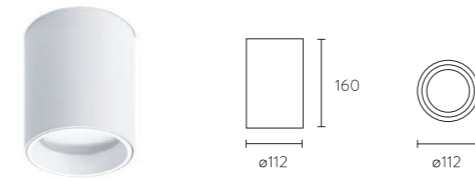

Item code	Product description	Power	CCT	Luminous flux (Lm)	CRI	Beam Angle	Finishing
N0424-1468	Fluvia LED-ARCH WH-RD-Surf 9W2700K18°	9W	2700K	750	90	18°	White
N0424-1469	Fluvia LED-ARCH WH-RD-Surf 9W2700K40°	9W	2700K	750	90	40°	White
N0424-1471	Fluvia LED-ARCH WH-RD-Surf 9W3000K18°	9W	3000K	760	90	18°	White
N0424-1472	Fluvia LED-ARCH WH-RD-Surf 9W3000K40°	9W	3000K	760	90	40°	White
N0424-1474	Fluvia LED-ARCH WH-RD-Surf 9W4000K18°	9W	4000K	830	90	18°	White
N0424-1475	Fluvia LED-ARCH WH-RD-Surf 9W4000K40°	9W	4000K	830	90	40°	White
N0424-1477	Fluvia LED-ARCH BK-RD-Surf 9W2700K18°	9W	2700K	750	90	18°	Black
N0424-1478	Fluvia LED-ARCH BK-RD-Surf 9W2700K40°	9W	2700K	750	90	40°	Black
N0424-1480	Fluvia LED-ARCH BK-RD-Surf 9W3000K18°	9W	3000K	760	90	18°	Black
N0424-1481	Fluvia LED-ARCH BK-RD-Surf 9W3000K40°	9W	3000K	760	90	40°	Black
N0424-1483	Fluvia LED-ARCH BK-RD-Surf 9W4000K18°	9W	4000K	830	90	18°	Black
N0424-1484	Fluvia LED-ARCH BK-RD-Surf 9W4000K40°	9W	4000K	830	90	40°	Black

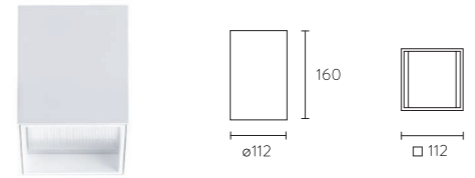

Item code	Product description	Power	CCT	Luminous flux (Lm)	CRI	Beam Angle	Finishing
N0424-1504	Fluvia LED-ARCH WH-SQ-Surf 9W2700K18°	9W	2700K	750	90	18°	White
N0424-1505	Fluvia LED-ARCH WH-SQ-Surf 9W2700K40°	9W	2700K	750	90	40°	White
N0424-1507	Fluvia LED-ARCH WH-SQ-Surf 9W3000K18°	9W	3000K	760	90	18°	White
N0424-1508	Fluvia LED-ARCH WH-SQ-Surf 9W3000K40°	9W	3000K	760	90	40°	White
N0424-1510	Fluvia LED-ARCH WH-SQ-Surf 9W4000K18°	9W	4000K	830	90	18°	White
N0424-1511	Fluvia LED-ARCH WH-SQ-Surf 9W4000K40°	9W	4000K	830	90	40°	White
N0424-1513	Fluvia LED-ARCH BK-SQ-Surf 9W2700K18°	9W	2700K	750	90	18°	Black
N0424-1514	Fluvia LED-ARCH BK-SQ-Surf 9W2700K40°	9W	2700K	750	90	40°	Black
N0424-1516	Fluvia LED-ARCH BK-SQ-Surf 9W3000K18°	9W	3000K	760	90	18°	Black
N0424-1517	Fluvia LED-ARCH BK-SQ-Surf 9W3000K40°	9W	3000K	760	90	40°	Black
N0424-1519	Fluvia LED-ARCH BK-SQ-Surf 9W4000K18°	9W	4000K	830	90	18°	Black
N0424-1520	Fluvia LED-ARCH BK-SQ-Surf 9W4000K40°	9W	4000K	830	90	40°	Black

Arch dimmer accessories

Item code	Product description	PF
N6524-0288	Fluvia ARCH Driver 9W on-off	0.5
N6524-0289	Fluvia ARCH Dim-Driver 9-12W 1-10V	0.9
N6524-0290	Fluvia ARCH Dim-Driver 9-12W DALI	0.9

* Every reference includes on-off driver. If regulation needed, order power supply separately.

